

AI-generated

Where we do not yet have current site photos, we show our equipment using modern AI tools – so you can get an accurate picture today.

KabelFIX & KabelFIX Light

Attachment for OilQuick/LIKUFIX adapters

For transporting and unwinding cable drums

Euro Test

Voluntary type examination based on EU legislation and European standards.

Testing body: DGUV Test, Construction Division.
Mark holder: BG BAU.



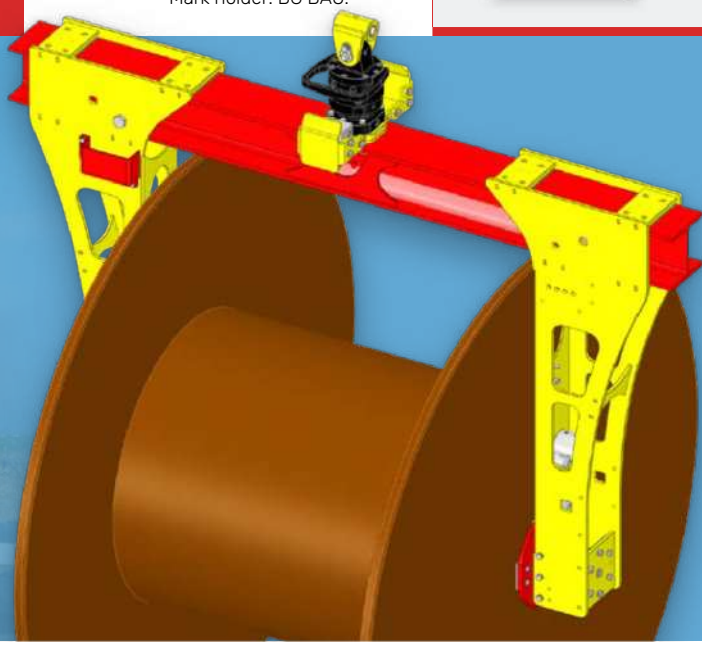

up to 5.5 t	500 – 1,600 mm	up to 2,800 mm	800 – 1,100 kg
Capacity	Drum width	Drum Ø	Weight





	KabelFIX	KabelFIX Light NEW
Art. no.	80850	80840
Capacity	5.5 t	3 t
Drum width	600 - 1,600 mm	500 - 1,200 mm
Drum Ø	max. 2,800 mm	max. 2,400 mm
Pressure open	100 bar	100 bar
Pressure close	200 bar	200 bar
Rotate unit	140 bar	140 bar
Rotate drum	140 bar	140 bar
Weight	1,100 kg	800 kg

Drum width and drum Ø

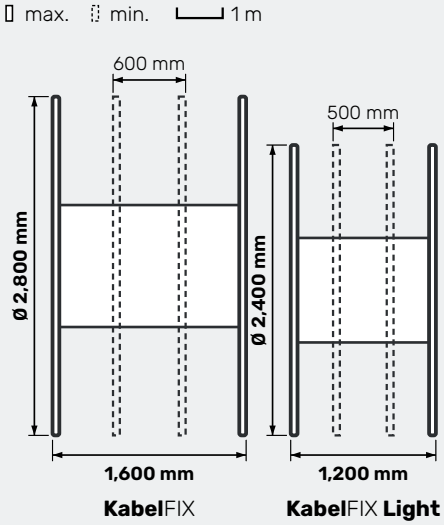

FEATURES

Compatible with attachment adapter, page 36

- ✓ Designed as an **attachment** for **OilQuick** or **LIKUFIX** quick couplers
- ✓ **Precise, fast positioning** of the drum directly above the trench **without an assistant**
- ✓ **360° rotation** via the integrated rotary motor
- ✓ **Extends the use** of existing **OilQuick** or **LIKUFIX** quick coupler systems
- ✓ **Hydraulic pick-up** of the cable drum – controlled from the cab
- ✓ The cable drum is rotated **using the controls in the cab**
- ✓ **Makes** cable **laying** easier
- ✓ **Minimises** the **risk of accidents and injury** on site