MultiFIX mechanical

Mechanical pipe grab

For concrete and vitrified clay pipes up to DN 800

Euro Test

Voluntary type examination based on EU legislation and European standards.

Testing body: DGUV Test, Construction Division.
Mark holder: BG BAU.



2.5 t	420 - 1,010 mm	200 kg	80400
Capacity	Pipe OD	Weight	Art. no.

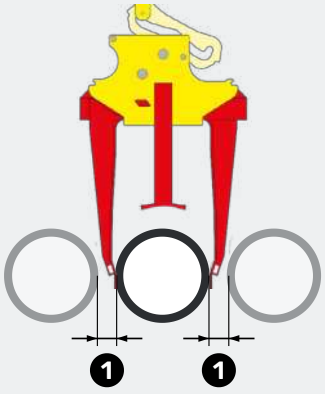

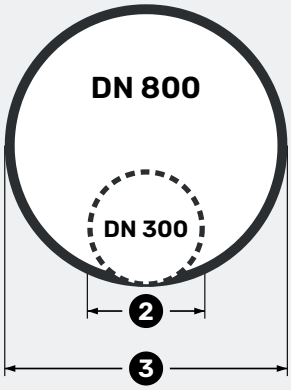

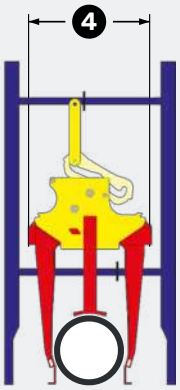

Concrete pipes

Infinitely adjustable from DN 300 to DN 800

1. Pipe spacing **min. 60 mm**
2. DN 300 • OD **min. 420 mm**
3. DN 800 • OD **max. 1,010 mm**
4. Width **750 mm**, work in trench shoring

VERSION

Pipes DN 300 - DN 800

Compatible with pipe pusher, page 16

FEATURES

- ✓ Quick, **tool-free adjustment** between **DN 300 – DN 800**
- ✓ **One-person operation** by the operator
- ✓ **Low-wear** thanks to high-quality workmanship
- ✓ **Excellent occupational safety**
- ✓ **Capacity 2.5 t**
- ✓ **No gripping arm change required**
- ✓ **Small lateral footprint** when working in trench shoring
- ✓ Unambiguous **DN-based setting**
- ✓ Ideal for lifting **tightly stacked pipes**
- ✓ **Low-maintenance** mechanics

Schmölz SchachtFix & Baugeräte GmbH | Tel. +49 (0) 8349 9720 | vertrieb@schachtfix.info | schacht-fix.de