PipeFIX 500

Mechanical pipe grab

For concrete pipes up to DN 500

Euro Test

Voluntary type examination based on EU legislation and European standards.

Testing body: DGUV Test, Construction Division.
Mark holder: BG BAU.

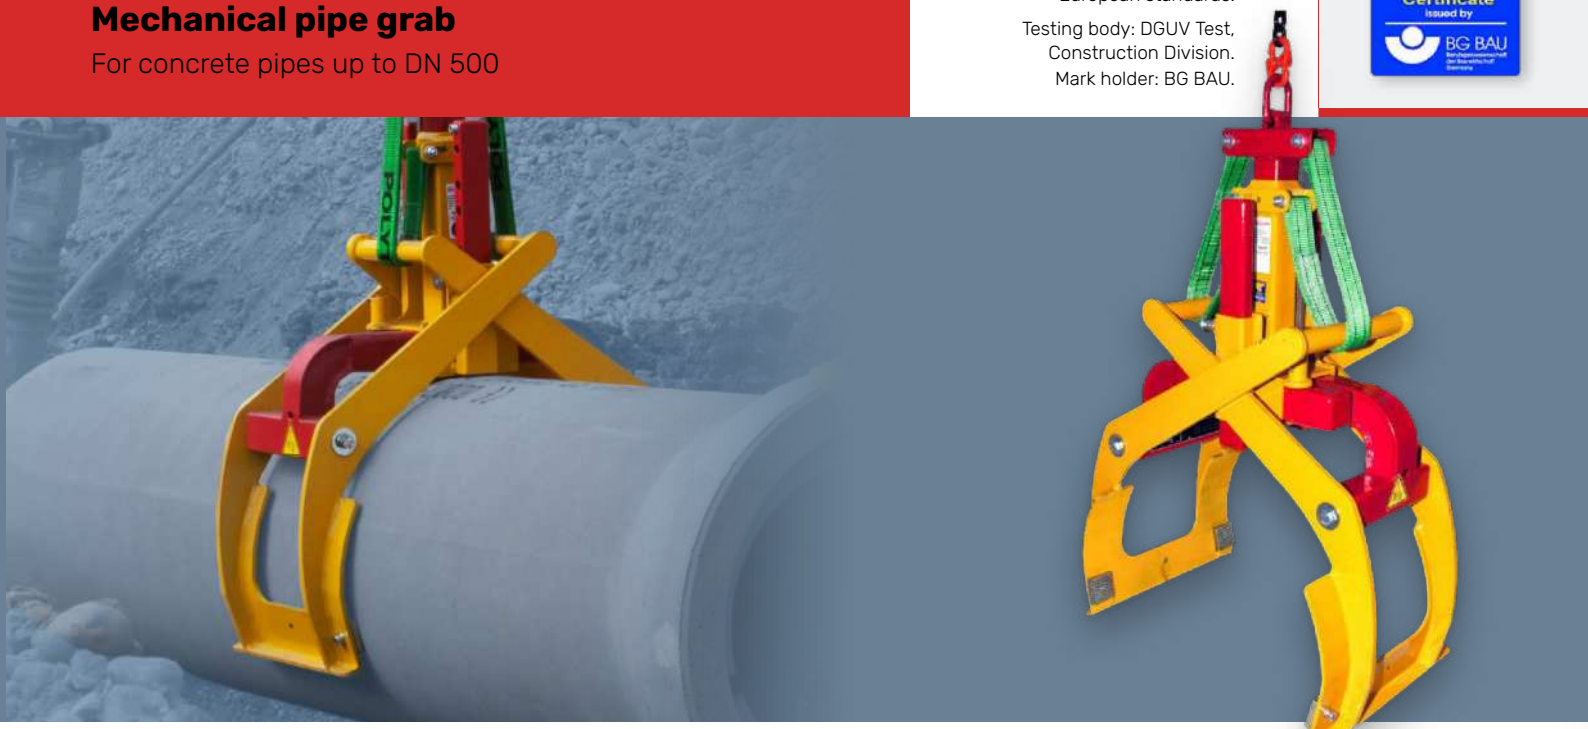

1.7 t	210 – 670 mm	110 kg	80200
Capacity	Pipe OD	Weight	Art. no.

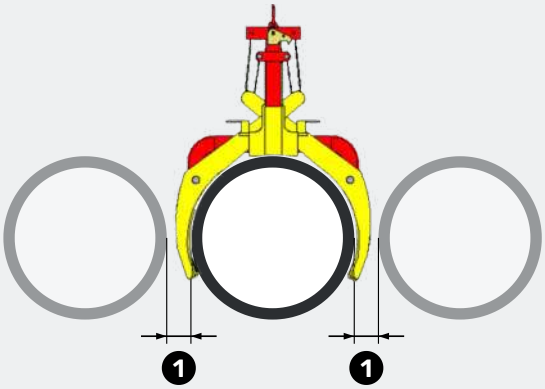

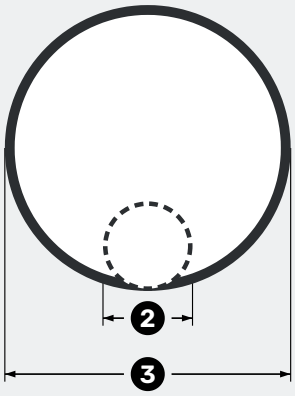

Concrete pipes
DN 200 - DN 500

1. Pipe spacing **min. 60 mm**
2. OD **min. 210 mm**
3. OD **max. 670 mm**

VERSION

DN 200 - DN 500 concrete

Compatible with pipe pusher, page 16

FEATURES

- ✓ **One-person operation** by the operator
- ✓ Unambiguous **DN-based setting**
- ✓ Ideal for lifting **closely spaced pipes**
- ✓ **Low-maintenance** mechanics
- ✓ Quick, **tool-free adjustment** between **DN 200 – DN 500**
- ✓ **Small lateral footprint** when working in trench shoring
- ✓ **Excellent occupational safety**

Schmölz SchachtFix & Baugeräte GmbH | Tel. +49 (0) 8349 9720 | vertrieb@schachtfix.info | schacht-fix.de


POLY
POLY