PipeFIX Light

Mechanical pipe grab

For vitrified clay, cast iron and PVC pipes up to DN 300

Euro Test

Voluntary type examination based on EU legislation and European standards.

Testing body: DGUV Test, Construction Division.
Mark holder: BG BAU.

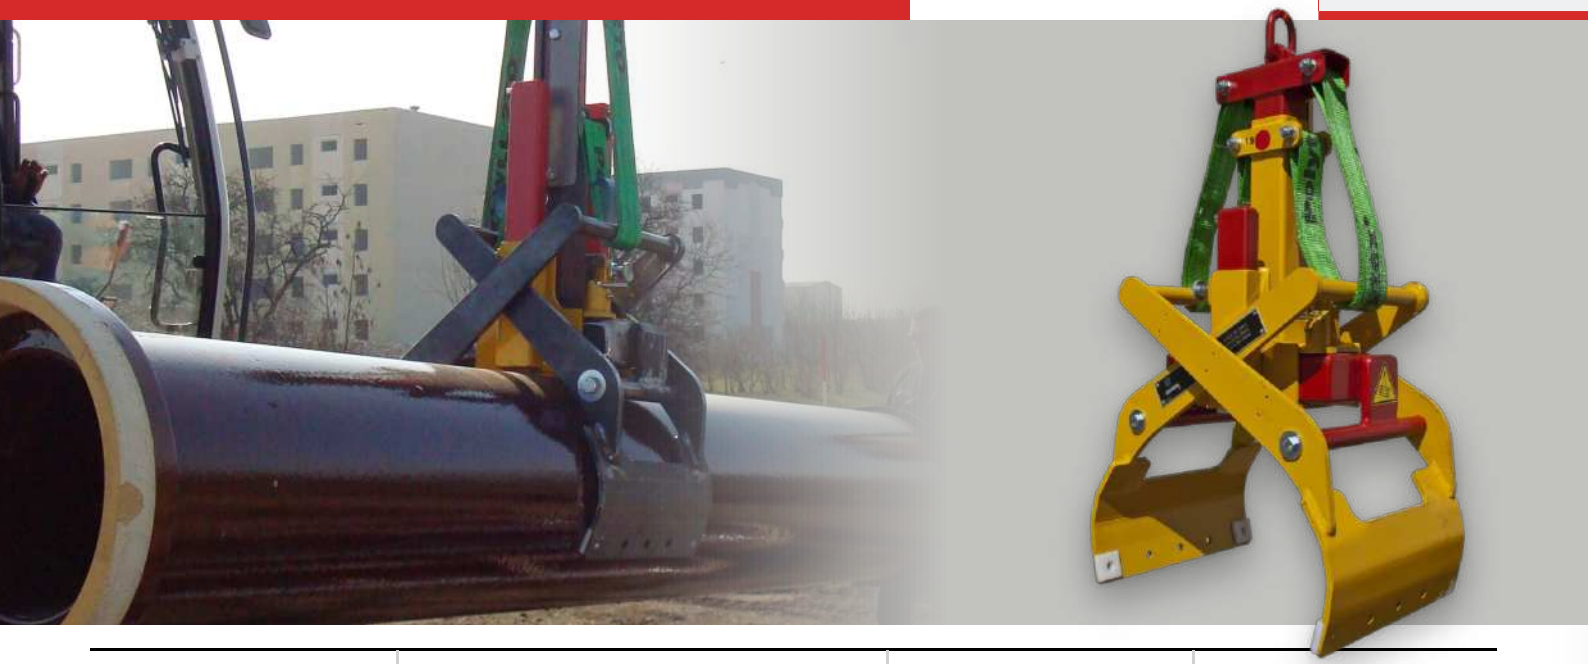

0.4 t	210 – 390 mm	65 kg	80300
Capacity	Pipe OD	Weight	Art. no.

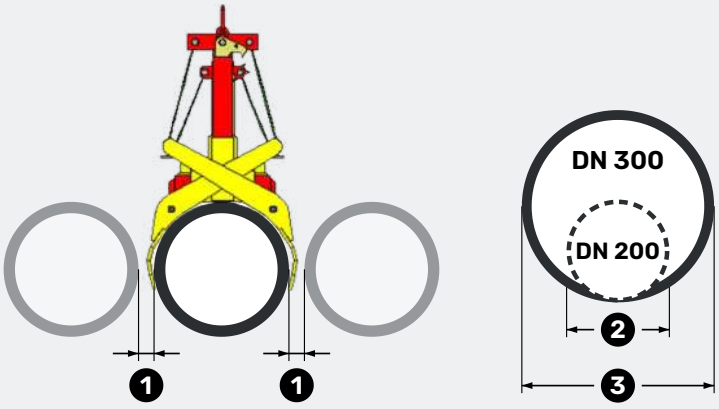

For vitrified clay, cast iron and PVC pipes

DN 200 - DN 300

1. Pipe spacing **min. 20 mm**
2. DN 200 • OD **min. 210 mm**
3. DN 300 • OD **max. 390 mm**

VERSION

DN 200 - DN 300

Vitrified clay, cast iron, PVC pipes

Compatible with pipe pusher, page 16

FEATURES

- ✓ Direct **removal of vitrified clay pipes from the stack without assistants**
- ✓ Quick, **tool-free adjustment** between **DN 200 – DN 300**
- ✓ **Small lateral footprint** when working in trench shoring
- ✓ **Excellent occupational safety**
- ✓ **One-person operation** by the operator
- ✓ Unambiguous **DN-based setting**
- ✓ Ideal for lifting **closely spaced pipes**
- ✓ **Low-maintenance** mechanics