Platten**Greifer**

Shoring panel grab

for OilQuick & LIKUFIX adapters

Euro Test

Voluntary type examination based on EU legislation and European standards.

Testing body: DGUV Test, Construction Division.
Mark holder: BG BAU.



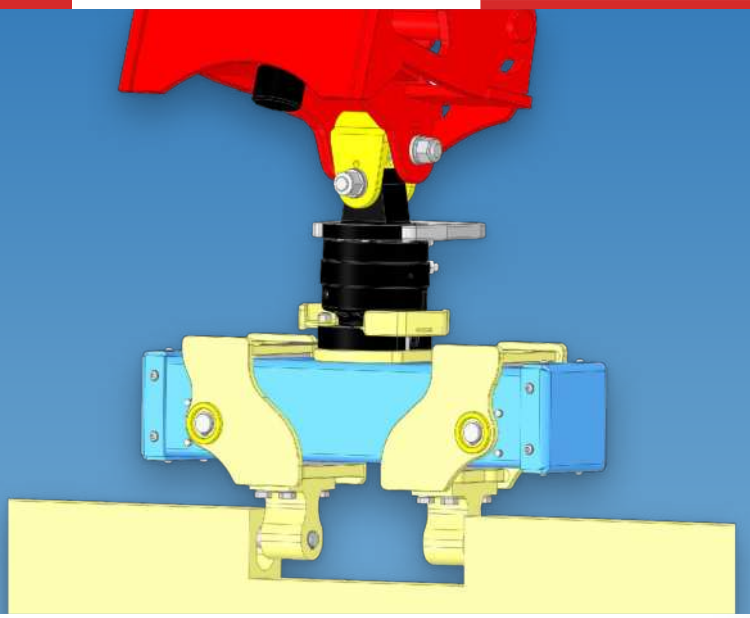

6.4 t	**510 mm**	**360°**	**150 kg**
Capacity	Mounting bush spacing	Rotation	Weight

Technical data

Parameter	Value
Spacing of the mounting bushes on the shoring panel	510 mm
Pressure open	100 bar
Pressure close	100 bar
Pressure rotate	140 bar
Weight	150 kg

Version

Art. no.	Version
81450	Capacity 6.4 t

360° rotation via the integrated rotary motor

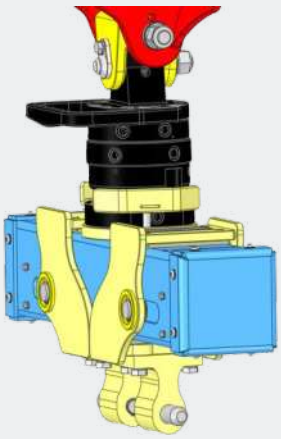

FEATURES

Compatible with attachment adapter, page 36

- ✓ Designed as an **attachment** for **OilQuick** or **LIKUFIX** quick couplers
- ✓ **Hydraulic pick-up** of the shoring panels – controlled from the cab
- ✓ **No** manual **slinging** and **unhooking** of **chains**
- ✓ **High swing stability**
- ✓ **Safe handling** on confined sites
- ✓ **Precise, fast positioning** in the trench without an assistant
- ✓ **Extends** the range of use of existing **OilQuick** or **LIKUFIX** quick coupler systems
- ✓ **Minimises** the **risk of accidents and injury** on site
- ✓ **Streamlines** and **optimises** the **removal** of shoring components

Schmölz SchachtFix & Baugeräte GmbH | Tel. +49 (0) 8349 9720 | vertrieb@schachtfix.info | schacht-fix.de

IN ACTION





SOLD
ONLY VIA
SBH