VerbauGreifer

For OilQuick & LIKUFIX adapters

Available in 4 different working widths

Euro Test

Voluntary type examination based on EU legislation and European standards.

Testing body: DGUV Test, Construction Division.
Mark holder: BG BAU.

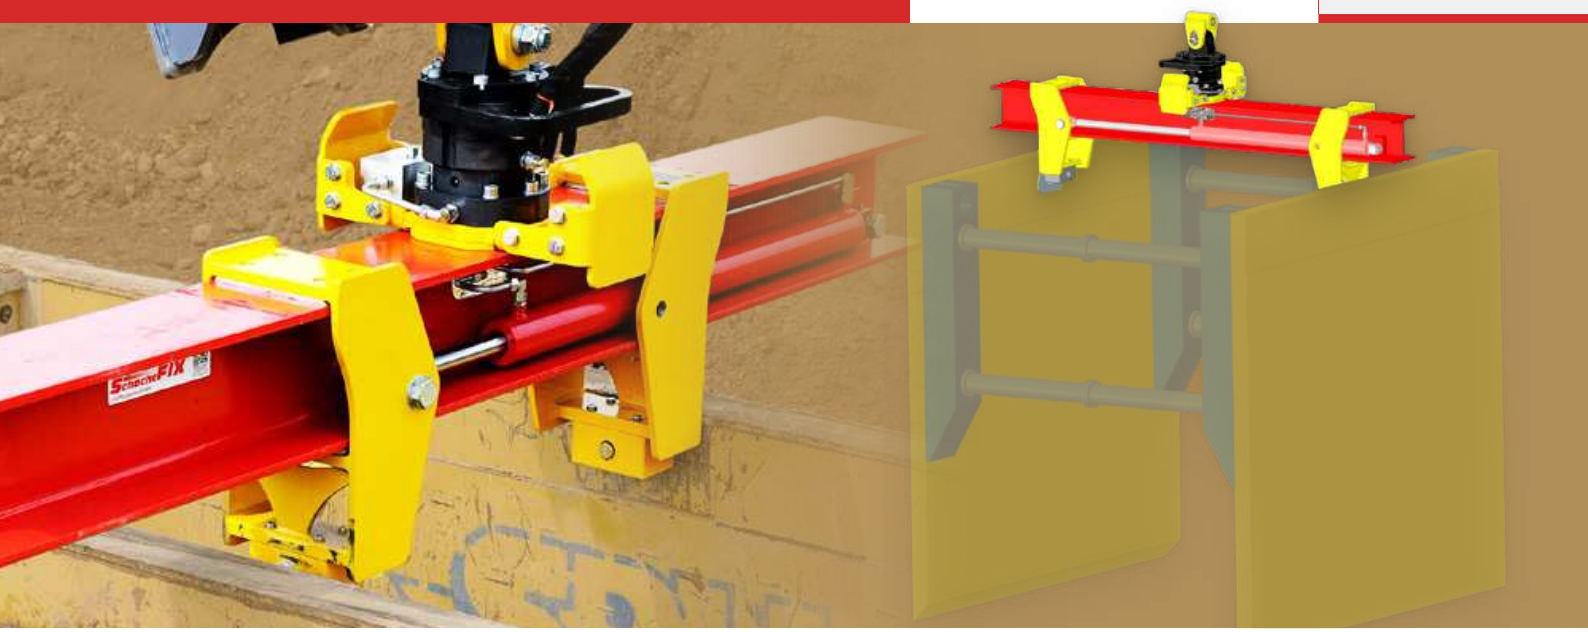

6.4 t	640 – 2,900 mm	1,600 – 3,000 mm	360°
Capacity	Box width	Beam length	Rotation

Beam length to scale

1 m



Art. no.	81430	81420	81410	81400
Beam length	1,600 mm	2,200 mm	2,600 mm	3,000 mm
Box width min.	640 mm	640 mm	640 mm	640 mm
Box width max.	1,500 mm	2,100 mm	2,500 mm	2,900 mm
Capacity	6.4 t	6.4 t	6.4 t	6.4 t
Pressure open	100 bar	100 bar	100 bar	100 bar
Pressure close	100 bar	100 bar	100 bar	100 bar
Pressure rotate	140 bar	140 bar	140 bar	140 bar

Minimum and maximum width

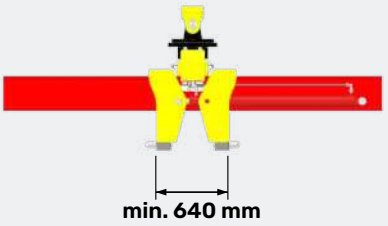

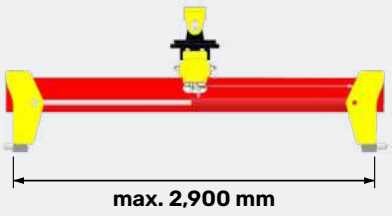

FEATURES

Compatible with attachment adapter, page 36

- ✓ Designed as an **attachment** for **OilQuick** or **LIKUFIX** quick couplers
- ✓ **High swing stability & safe handling** on confined sites
- ✓ **Extends** the use of **existing OilQuick** or **LIKUFIX** quick coupler systems
- ✓ **Hydraulic pick-up** of the trench box, **controlled** from the **cab**
- ✓ **Precise, fast positioning** in the trench without an assistant
- ✓ **Streamlines** and **optimises** the **removal** of **shoring components**
- ✓ **No manual slinging** and **unhooking** of chains when using the trench box grab
- ✓ **360° rotation** via the **integrated rotary motor**
- ✓ **Minimises** the **risk of accidents and injury** on site

Schmölz SchachtFix & Baugeräte GmbH | Tel. +49 (0) 8349 9720 | vertrieb@schachtfix.info | schacht-fix.de

